
# **RFNA4PGID** Datasheet



## Product Name // N Plug Straight 4 Hole Flange RF

### Connector



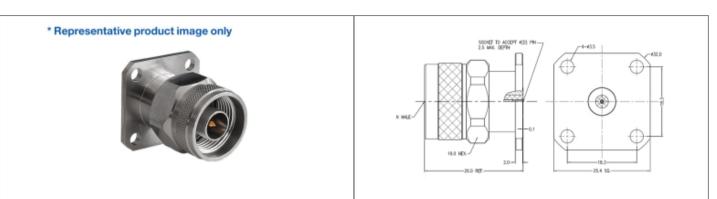

#### // Product Description:

- O N Plug Straight 4 Hole Flange RF Connector
- O Maximum Voltage: 500V
- O Temperature range: -55°C to +155°C
- O Frecuency range: 0GHz 18GHz
- O VSWR:

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### // General Information:

**Product Display Title: Product Family: Product Series:** Body Length: **Body Material:** Centre Contact Retention Force: Contact Pin Material: Min Coupling Torque: Max Coupling Torque: **Dielectric Withstanding Voltage:** Durability: Flange Mount Length: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter: Voltage Max: Vswr:

N Type Series Socket 4 Hole Flange **Radio Frequency Connectors** N Type Series 26.00mm Stainless Steel Passivation >26.7N **Beryllium Copper** 0.80Nm 1.10Nm >1500V >500 cycles 25.40mm Male Flange Mount RF Connector 50Ohm >5000MOhm Adapter ASTM D 1710 & PEI +155°C -55°C 18.30mm 0GHz 18GHz 0.46mm 500V <1.30

#### // Product PDF Links

N Type Series Product Datasheet

// Product 3D CAD Model Links

RFNA4PGID3D CAD Model