# RFNA4PGILGIE Datasheet




# Product Name // N Plug Straight 4 Hole Flange RF Connector

View Product Page

# \* Representative product image only



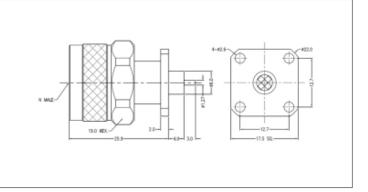

#### // Product Description:

- 0 N Plug Straight 4 Hole Flange RF Connector
- 0 Maximum Voltage: 500V
- 0 Temperature range: -55°C to +155°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >1500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

# // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque:

Max Coupling Torque:

Dielectric Withstanding Voltage:

**Durability:** 

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance:

Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Voltage Max: Vswr:

N Type Series Pin with Extended PTFE 4 Hole Flange

Radio Frequency Connectors

N Type Series

25.90mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm

>1500V

>500 cycles

25.40mm

Male Flange Mount RF Connector

500hm

>5000MOhm

Adapter ASTM D 1710 & PEI

+155°C -55°C 18.30mm

0GHz 18GHz 1.27mm 3.00mm 6.00mm

4.00mm 500V <1.30

# // Product PDF Links



# // Product 3D CAD Model Links



RFNA4PGILGIE3D CAD Model