RFNA4PGIMF Datasheet




Product Name // N Plug Straight 4 Hole Flange RF Connector



* Representative product image only



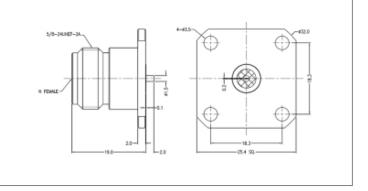

// Product Description:

- N Plug Straight 4 Hole Flange RF Connector
- Maximum Voltage: 500V
- 0 Temperature range: -55°C to +155°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR:

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family: Product Series: Body Length: **Body Material:**

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Voltage Max: Vswr:

N Type Series Pin without Extended PTFE 4 Hole Flange

Radio Frequency Connectors

N Type Series 26.00mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm >1500V >500 cycles 25.40mm

Male Flange Mount RF Connector

50Ohm >5000MOhm

Adapter ASTM D 1710 & PEI

+155°C -55°C 18.30mm 0GHz 18GHz 1.50mm 2.00mm 500V <1.30

// Product PDF Links



// Product 3D CAD Model Links



RFNA4PGIMF3D CAD Model