# **RFSMAA2JCCHR Datasheet**




## Product Name // SMA Straight Jack 2 Hole Flange RF Connector

View Product Page

### \* Representative product image only



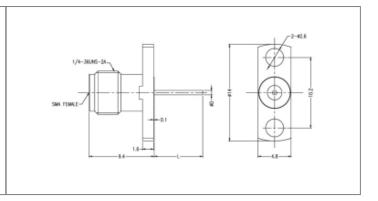

#### // Product Description:

- 0 SMA Straight Jack 2 Hole Flange RF Connector
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 26.5GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

#### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

**Coupling Nut Retention Force:** 

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature:

Mount Hole Distance: Min Operating Frequency:

Max Operating Frequency: Pin Diameter:

Pin Length: Thread Size: Voltage Max: Vswr:

SMA Series Pin without Extended PTFE 2 Hole Flange

Radio Frequency Connectors

**SMA Series** 

9.40mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm

>27.2Kg

>750V

>500 cycles 12.70mm

Female Flange Mount RF Connector

500hm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C

8.60mm

0GHz

26.5GHz

0.87mm

26.00mm

1/4 36UNS 2A

335V

<1.30





SMA Series Product Datasheet

#### // Product 3D CAD Model Links



RFSMAA2JCCHR3D CAD Model