


RFSMAA2JCEBFGB Datasheet

Product Name // SMA Straight Jack 2 Hole Flange RF Connector

[View Product Page](#)

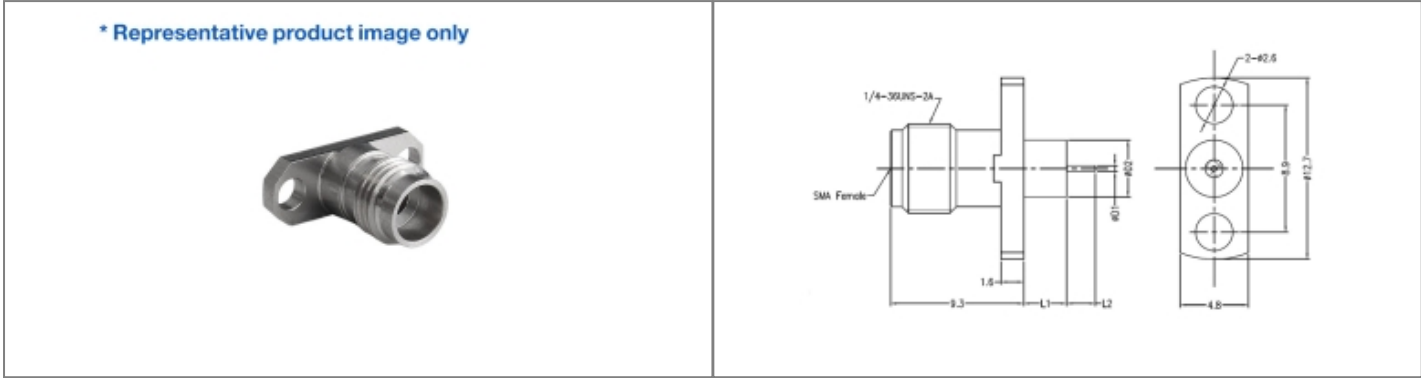

// Product Description:

<ul style="list-style-type: none"> ⊕ SMA Straight Jack 2 Hole Flange RF Connector ⊕ Maximum Voltage: 335V ⊕ Temperature range: -65°C to +165°C ⊕ Frequency range: 0GHz - 26.5GHz ⊕ VSWR: <1.30 	<ul style="list-style-type: none"> ⊕ Dielectric withstanding Voltage: >750V ⊕ Impedance: 50Ohm ⊕ Body Material: Stainless Steel Passivation ⊕ Contact Material: Beryllium Copper
--	---

// General Information:


Product Display Title:	SMA Series Pin with Extended PTFE 2 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	SMA Series
Body Length:	9.30mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Coupling Nut Retention Force:	>27.2Kg
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Flange Mount Length:	12.70mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Mount Hole Distance:	8.90mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	26.5GHz
Pin Diameter:	0.38mm
Pin Length:	2.00mm
Ptfe Diameter:	4.00mm
Ptfe Length:	3.00mm
Thread Size:	1/4 36UNS 2A
Voltage Max:	335V
Vswr:	<1.30

// Product PDF Links

[SMA Series Product Datasheet](#)

// Product 3D CAD Model Links

[RFSMAA2JCEBFGB3D CAD Model](#)

 Have a question or project enquiry you'd like to talk to us about?

[Click Here To Contact Us](#)