# RFSMAA2JEGDQ Datasheet




# Product Name // SMA Straight Jack 2 Hole Flange RF Connector

View Product Page

## \* Representative product image only



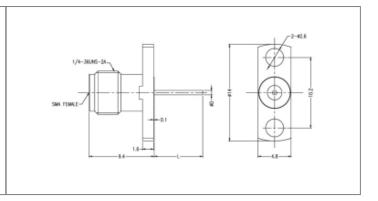

### // Product Description:

- 0 SMA Straight Jack 2 Hole Flange RF Connector
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 26.5GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

#### // General Information:

**Product Display Title: Product Family:** 

**Product Series:** 

Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

**Coupling Nut Retention Force:** Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Thread Size: Voltage Max: Vswr:

SMA Series Pin without Extended PTFE 2 Hole Flange

Radio Frequency Connectors

**SMA Series** 

9.40mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm >27.2Kg

>750V >500 cycles

15.80mm

Female Flange Mount RF Connector

500hm >5000MOhm

Adapter ASTM D 1710

+165°C -65°C 12.20mm 0GHz 26.5GHz 0.64mm

18.00mm 1/4 36UNS 2A 335V

<1.30

// Product PDF Links

SMA Series Product Datasheet

// Product 3D CAD Model Links

RFSMAA2JEGDQ3D CAD Model