
RFSMAA2JEGE Datasheet



Product Name // SMA Straight Jack 2 Hole Flange RF Connector

View Product Page



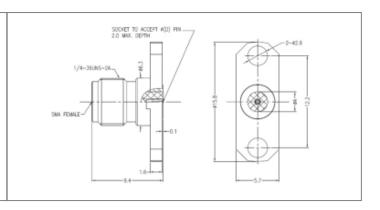

// Product Description:

- SMA Straight Jack 2 Hole Flange RF Connector
- Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- Frecuency range: 0GHz 26.5GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: Product Series:

Body Material:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:
Min Coupling Torque:
Max Coupling Torque:
Coupling Nut Retention Force:
Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:
Min Operating Temperature:
Mount Hole Distance:
Min Operating Frequency:
Max Operating Frequency:
Socket Diameter:
Socket Outer Diameter:

Thread Size: Voltage Max: Vswr: SMA Series Socket 2 Hole Flange

Radio Frequency Connectors SMA Series

9.40mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm >27.2Kg >750V >500 cycles 15.80mm

Female Flange Mount RF Connector

50Ohm >5000MOhm

Adapter ASTM D 1710

+165°C -65°C 12.20mm 0GHz 26.5GHz 0.51mm 2.65mm 1/4 36UNS 2A 335V <1.30

// Product PDF Links // Product 3D CAD Model Links



