
# **RFSMAA2PDFBFGB** Datasheet



# Product Name // SMA Straight Plug 2 Hole Flange RF

## Connector

View Product Page

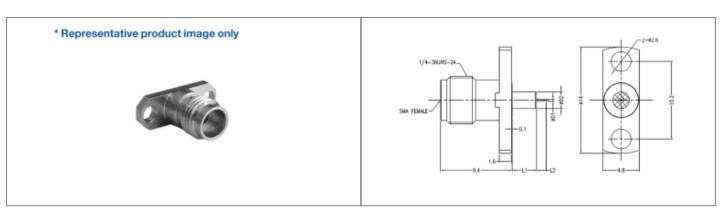

#### // Product Description:

- O SMA Straight Plug 2 Hole Flange RF Connector
- O Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- Frecuency range: 0GHz 26.5GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm

Radio Frequency Connectors

O Body Material: Stainless Steel Passivation

SMA Series Pin with Extended PTFE 2 Hole Flange

O Contact Material: Beryllium Copper

### // General Information:

**Product Display Title: Product Family: Product Series:** Body Length: **Body Material: Centre Contact Retention Force: Contact Pin Material:** Min Coupling Torque: Max Coupling Torque: **Coupling Nut Retention Force:** Dielectric Withstanding Voltage: Durability: Flange Mount Length: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Voltage Max: Vswr:

**SMA Series** 12.70mm Stainless Steel Passivation >26.7N Beryllium Copper 0.80Nm 1.10Nm >27.2Kg >750V >500 cycles 14.00mm Male Flange Mount RF Connector 50Ohm >5000MOhm Adapter ASTM D 1710 +165°C -65°C 10.20mm

#### 0GHz 26.5GHz 0.38mm 2.00mm 4.00mm 3.00mm 335V

<1.30

// Product PDF Links

SMA Series Product Datasheet

// Product 3D CAD Model Links

RFSMAA2PDFBFGB3D CAD Model