


**Product Name // SMA Straight Jack 4 Hole Flange RF Connector**

[View Product Page](#)

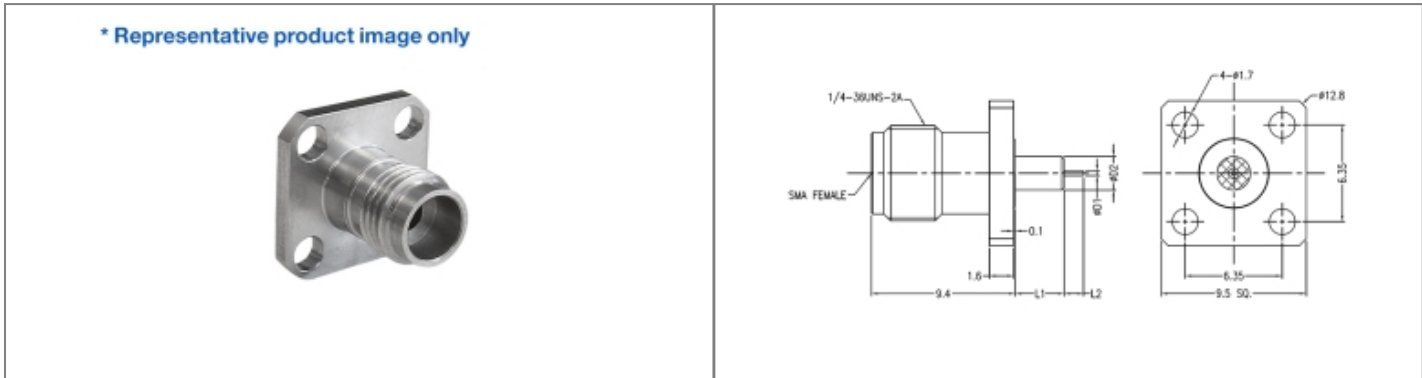

**// Product Description:**

<ul style="list-style-type: none"> <li>⊕ SMA Straight Jack 4 Hole Flange RF Connector</li> <li>⊕ Maximum Voltage: 335V</li> <li>⊕ Temperature range: -65°C to +165°C</li> <li>⊕ Frequency range: 0GHz - 26.5GHz</li> <li>⊕ VSWR: &lt;1.30</li> </ul>	<ul style="list-style-type: none"> <li>⊕ Dielectric withstanding Voltage: &gt;750V</li> <li>⊕ Impedance: 50Ohm</li> <li>⊕ Body Material: Stainless Steel Passivation</li> <li>⊕ Contact Material: Beryllium Copper</li> </ul>
--	---

**// General Information:**

<p>Product Display Title:</p> <p>Product Family:</p> <p>Product Series:</p> <p>Body Length:</p> <p>Body Material:</p> <p>Centre Contact Retention Force:</p> <p>Contact Pin Material:</p> <p>Min Coupling Torque:</p> <p>Max Coupling Torque:</p> <p>Coupling Nut Retention Force:</p> <p>Dielectric Withstanding Voltage:</p> <p>Durability:</p> <p>Flange Mount Length:</p> <p>Function:</p> <p>Impedance:</p> <p>Insulation Resistance:</p> <p>Insulator:</p> <p>Max Operating Temperature:</p> <p>Min Operating Temperature:</p> <p>Mount Hole Distance:</p> <p>Min Operating Frequency:</p> <p>Max Operating Frequency:</p> <p>Pin Diameter:</p> <p>Pin Length:</p> <p>Ptfe Diameter:</p> <p>Ptfe Length:</p> <p>Thread Size:</p> <p>Voltage Max:</p> <p>Vswr:</p>	<p>SMA Series Pin with Extended PTFE 4 Hole Flange</p> <p>Radio Frequency Connectors</p> <p>SMA Series</p> <p>9.40mm</p> <p>Stainless Steel Passivation</p> <p>&gt;26.7N</p> <p>Beryllium Copper</p> <p>0.80Nm</p> <p>1.10Nm</p> <p>&gt;27.2Kg</p> <p>&gt;750V</p> <p>&gt;500 cycles</p> <p>9.50mm</p> <p>Female Flange Mount RF Connector</p> <p>50Ohm</p> <p>&gt;5000MOhm</p> <p>Adapter ASTM D 1710</p> <p>+165°C</p> <p>-65°C</p> <p>6.35mm</p> <p>0GHz</p> <p>26.5GHz</p> <p>0.30mm</p> <p>1.27mm</p> <p>2.20mm</p> <p>3.20mm</p> <p>1/4 36UNS 2A</p> <p>335V</p> <p>&lt;1.30</p>
---	--

**// Product PDF Links**

[SMA Series Product Datasheet](#)

**// Product 3D CAD Model Links**

[RFSMAA4JAAACDD3D CAD Model](#)