


Product Name // SMA Straight Jack 4 Hole Flange RF Connector

[View Product Page](#)

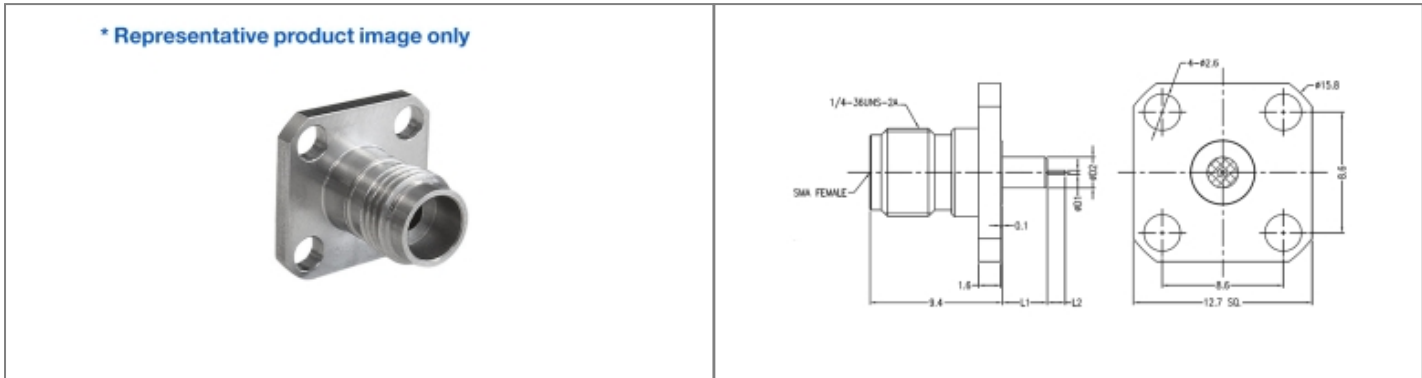

// Product Description:

<ul style="list-style-type: none"> ⦿ SMA Straight Jack 4 Hole Flange RF Connector ⦿ Maximum Voltage: 335V ⦿ Temperature range: -65°C to +165°C ⦿ Frequency range: 0GHz - 26.5GHz ⦿ VSWR: <1.30 	<ul style="list-style-type: none"> ⦿ Dielectric withstanding Voltage: >750V ⦿ Impedance: 50Ohm ⦿ Body Material: Stainless Steel Passivation ⦿ Contact Material: Beryllium Copper
--	---

// General Information:

<p>Product Display Title:</p> <p>Product Family:</p> <p>Product Series:</p> <p>Body Length:</p> <p>Body Material:</p> <p>Centre Contact Retention Force:</p> <p>Contact Pin Material:</p> <p>Min Coupling Torque:</p> <p>Max Coupling Torque:</p> <p>Coupling Nut Retention Force:</p> <p>Dielectric Withstanding Voltage:</p> <p>Durability:</p> <p>Flange Mount Length:</p> <p>Function:</p> <p>Impedance:</p> <p>Insulation Resistance:</p> <p>Insulator:</p> <p>Max Operating Temperature:</p> <p>Min Operating Temperature:</p> <p>Mount Hole Distance:</p> <p>Min Operating Frequency:</p> <p>Max Operating Frequency:</p> <p>Pin Diameter:</p> <p>Pin Length:</p> <p>Ptfe Diameter:</p> <p>Ptfe Length:</p> <p>Thread Size:</p> <p>Voltage Max:</p> <p>Vswr:</p>	<p>SMA Series Pin with Extended PTFE 4 Hole Flange</p> <p>Radio Frequency Connectors</p> <p>SMA Series</p> <p>9.30mm</p> <p>Stainless Steel Passivation</p> <p>>26.7N</p> <p>Beryllium Copper</p> <p>0.80Nm</p> <p>1.10Nm</p> <p>>27.2Kg</p> <p>>750V</p> <p>>500 cycles</p> <p>12.70mm</p> <p>Female Flange Mount RF Connector</p> <p>50Ohm</p> <p>>5000MOhm</p> <p>Adapter ASTM D 1710</p> <p>+165°C</p> <p>-65°C</p> <p>8.60mm</p> <p>0GHz</p> <p>26.5GHz</p> <p>0.38mm</p> <p>2.00mm</p> <p>4.00mm</p> <p>3.00mm</p> <p>1/4 36UNS 2A</p> <p>335V</p> <p><1.30</p>
--	---

// Product PDF Links

[SMA Series Product Datasheet](#)

// Product 3D CAD Model Links

[RFSMAA4JCCBFGFB3D CAD Model](#)