# RFSMAA4JCCDGCI Datasheet




# Product Name // SMA Straight Jack 4 Hole Flange RF Connector

View Product Page

## \* Representative product image only



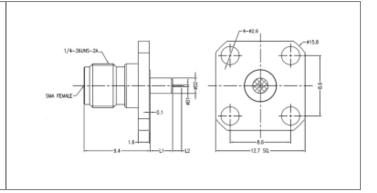

## // Product Description:

- 0 SMA Straight Jack 4 Hole Flange RF Connector
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 26.5GHz
- 0 VSWR: <1.30

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

## // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

**Coupling Nut Retention Force:** 

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature:

Mount Hole Distance: Min Operating Frequency:

Max Operating Frequency:

Pin Diameter: Pin Length:

Ptfe Diameter:

Ptfe Length:

Thread Size:

Voltage Max: Vswr:

SMA Series Pin with Extended PTFE 4 Hole Flange

Radio Frequency Connectors

SMA Series

9.40mm

Stainless Steel Passivation

>26.7N

Beryllium Copper 0.80Nm

1.10Nm

>27.2Kg

>750V

>500 cycles 12.70mm

Female Flange Mount RF Connector

500hm

>5000MOhm

Adapter ASTM D 1710

+165°C

-65°C

8.60mm 0GHz

26.5GHz

0.64mm

3.00mm

2.10mm

15.00mm

1/4 36UNS 2A

335V

<1.30

// Product PDF Links



SMA Series Product Datasheet

// Product 3D CAD Model Links



RFSMAA4JCCDGCI3D CAD Model