
RFSMAA4JCCHP Datasheet



View Product Page

Product Name // SMA Straight Jack 4 Hole Flange RF

Connector

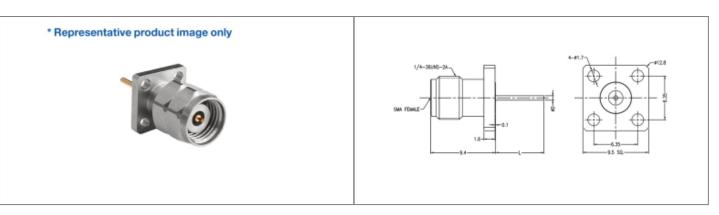

// Product Description:

- O SMA Straight Jack 4 Hole Flange RF Connector
- O Maximum Voltage: 335V
- Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 26.5GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation

SMA Series Pin without Extended PTFE 4 Hole Flange

O Contact Material: Beryllium Copper


// General Information:

Product Display Title: **Product Family: Product Series:** Body Length: **Body Material:** Centre Contact Retention Force: Contact Pin Material: Min Coupling Torque: Max Coupling Torque: **Coupling Nut Retention Force: Dielectric Withstanding Voltage:** Durability: Flange Mount Length: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Pin Diameter: Pin Length: Thread Size: Voltage Max: Vswr:

Radio Frequency Connectors SMA Series 9.40mm Stainless Steel Passivation >26.7N Beryllium Copper 0.80Nm 1.10Nm >27.2Kg >750V >500 cycles 12.70mm Female Flange Mount RF Connector 50Ohm >5000MOhm Adapter ASTM D 1710 +165°C -65°C 8.60mm 0GHz 26.5GHz 0.87mm 10.92mm 1/4 36UNS 2A 335V <1.30

// Product PDF Links

SMA Series Product Datasheet



RFSMAA4JCCHP3D CAD Model

Have a question or project enquiry you'd like to talk to us about?