


RFSMAA4JCCHR Datasheet

Product Name // SMA Straight Jack 4 Hole Flange RF Connector

 [View Product Page](#)

* Representative product image only

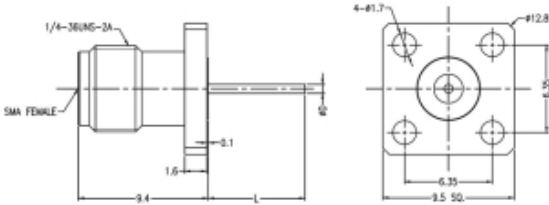

// Product Description:

- | | |
|--|--|
|  SMA Straight Jack 4 Hole Flange RF Connector |  Dielectric withstanding Voltage: >750V |
|  Maximum Voltage: 335V |  Impedance: 50Ohm |
|  Temperature range: -65°C to +165°C |  Body Material: Stainless Steel Passivation |
|  Frequency range: 0GHz - 26.5GHz |  Contact Material: Beryllium Copper |
|  VSWR: <1.30 | |

// General Information:

Product Display Title:	SMA Series Pin without Extended PTFE 4 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	SMA Series
Body Length:	9.40mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Coupling Nut Retention Force:	>27.2Kg
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Flange Mount Length:	12.70mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Mount Hole Distance:	8.60mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	26.5GHz
Pin Diameter:	0.87mm
Pin Length:	26.00mm
Thread Size:	1/4 36UNS 2A
Voltage Max:	335V
Vswr:	<1.30

// Product PDF Links

 [SMA Series Product Datasheet](#)

// Product 3D CAD Model Links

 [RFSMAA4JCCHR3D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)