# **RFSMAA4JCCIGHE** Datasheet




# Product Name // SMA Straight Jack 4 Hole Flange RF Connector

View Product Page

#### \* Representative product image only



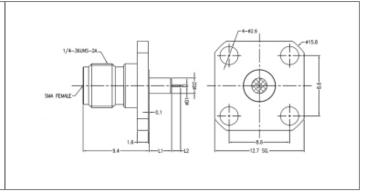

#### // Product Description:

- 0 SMA Straight Jack 4 Hole Flange RF Connector
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

#### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque: **Coupling Nut Retention Force:** 

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature:

Mount Hole Distance:

Min Operating Frequency: Max Operating Frequency:

Pin Diameter:

Pin Length:

Ptfe Diameter: Ptfe Length:

Thread Size:

Voltage Max:

Vswr:

SMA Series Pin with Extended PTFE 4 Hole Flange

Radio Frequency Connectors

SMA Series

9.40mm

Stainless Steel Passivation

>26.7N

Beryllium Copper 0.80Nm

1.10Nm

>27.2Kg >750V

>500 cycles

12.70mm

Female Flange Mount RF Connector

500hm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C

8.60mm

0GHz

18GHz

1.00mm

3.00mm

4.10mm

4.00mm

1/4 36UNS 2A

335V

<1.30

## // Product PDF Links



SMA Series Product Datasheet

### // Product 3D CAD Model Links



RFSMAA4JCCIGHE3D CAD Model