RFSMAA4PAAB Datasheet




Product Name // SMA Straight Plug 4 Hole Flange RF Connector



* Representative product image only



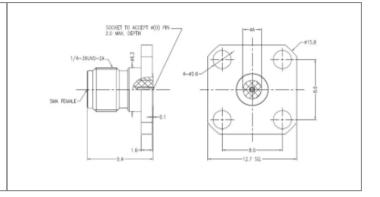

// Product Description:

- O SMA Straight Plug 4 Hole Flange RF Connector
- Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 26.5GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family:

Product Family:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:
Max Coupling Torque:

Coupling Nut Retention Force:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Socket Outer Diameter: Voltage Max:

Socket Diameter:

Vswr:

SMA Series Socket 4 Hole Flange Radio Frequency Connectors

SMA Series

12.80mm

Stainless Steel Passivation

>26.7N

Beryllium Copper 0.80Nm

1.10Nm

>27.2Kg

>750V >500 cycles

9.50mm

Male Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C 6.35mm 0GHz 26.5GHz 0.30mm 1.94mm

335V <1.30

// Product PDF Links



// Product 3D CAD Model Links



RFSMAA4PAAB3D CAD Model