
RFSMAA4PAABFGB Datasheet



Product Name // SMA Straight Plug 4 Hole Flange RF

Connector

View Product Page

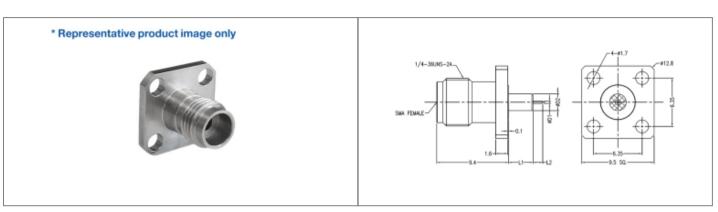

// Product Description:

- O SMA Straight Plug 4 Hole Flange RF Connector
- O Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 26.5GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

SMA Series Pin with Extended PTFE 4 Hole Flange Radio Frequency Connectors SMA Series 12.70mm Stainless Steel Passivation >26.7N Beryllium Copper 0.80Nm 1.10Nm >27.2Kg >750V >500 cycles 9.50mm Male Flange Mount RF Connector 50Ohm >5000MOhm Adapter ASTM D 1710 +165°C -65°C 6.35mm 0GHz 26.5GHz 0.38mm 2.00mm 4.00mm 3.00mm 335V <1.30

// Product PDF Links

SMA Series Product Datasheet



RFSMAA4PAABFGB3D CAD Model