RFSMAA4PAAC Datasheet




Product Name // SMA Straight Plug 4 Hole Flange RF Connector



* Representative product image only



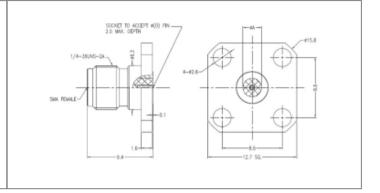

// Product Description:

- O SMA Straight Plug 4 Hole Flange RF Connector
- Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 26.5GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Coupling Nut Retention Force:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Voltage Max: Vswr:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter: Socket Outer Diameter:

SMA Series Socket 4 Hole Flange

Radio Frequency Connectors SMA Series

12.80mm

Stainless Steel Passivation

>26.7N

Beryllium Copper 0.80Nm

1.10Nm

>27.2Kg

>750V

>500 cycles

9.50mm

Male Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710 +165°C

-65°C 6.35mm 0GHz 26.5GHz 0.38mm 1.94mm 335V <1.30

// Product PDF Links



// Product 3D CAD Model Links



RFSMAA4PAAC3D CAD Model