# **RFSMAA4PAAE** Datasheet




# Product Name // SMA Straight Plug 4 Hole Flange RF Connector

View Product Page

# \* Representative product image only



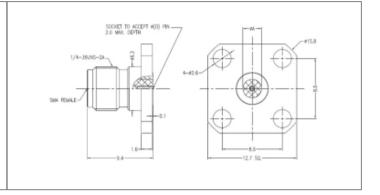

#### // Product Description:

- O SMA Straight Plug 4 Hole Flange RF Connector
- Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 26.5GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### // General Information:

**Product Display Title: Product Family:** Radio Frequency Connectors

**Product Series: Body Length:** 12.80mm

**Body Material:** Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque: 1.10Nm **Coupling Nut Retention Force:** >27.2Kg Dielectric Withstanding Voltage: >750V Durability:

Flange Mount Length:

Function:

Impedance:

Vswr:

Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter: Socket Outer Diameter:

Insulation Resistance: Insulator: Max Operating Temperature: Voltage Max:

SMA Series Socket 4 Hole Flange

SMA Series

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm >500 cycles 9.50mm

Male Flange Mount RF Connector

50Ohm >5000MOhm

Adapter ASTM D 1710

+165°C -65°C 6.35mm 0GHz 26.5GHz 0.51mm 2.65mm 335V <1.30

## // Product PDF Links



## // Product 3D CAD Model Links

