RFSMAA4PCCB Datasheet




Product Name // SMA Straight Plug 4 Hole Flange RF Connector

View Product Page

* Representative product image only



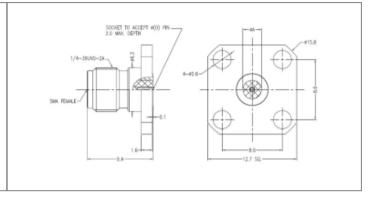

// Product Description:

- O SMA Straight Plug 4 Hole Flange RF Connector
- Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 26.5GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family: Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Coupling Nut Retention Force:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Socket Diameter: Socket Outer Diameter:

Voltage Max:

Vswr:

SMA Series Socket 4 Hole Flange

Radio Frequency Connectors SMA Series

12.80mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm

>27.2Kg

>750V

>500 cycles

12.70mm

Male Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C 8.60mm

0GHz

26.5GHz

0.30mm

1.94mm

335V

<1.30

// Product PDF Links



SMA Series Product Datasheet

// Product 3D CAD Model Links



RFSMAA4PCCB3D CAD Model