# **RFSMAA4PCCC Datasheet**




## Product Name // SMA Straight Plug 4 Hole Flange RF Connector

View Product Page

#### \* Representative product image only



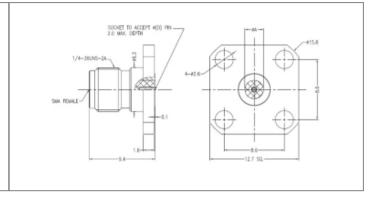

#### // Product Description:

- O SMA Straight Plug 4 Hole Flange RF Connector
- Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 26.5GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

**Coupling Nut Retention Force:** 

Durability:

Flange Mount Length:

Function: Impedance:

Insulator:

Min Operating Temperature: Mount Hole Distance:

Socket Diameter:

Voltage Max:

**Body Length:** 

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Insulation Resistance:

Max Operating Temperature:

Min Operating Frequency: Max Operating Frequency: Socket Outer Diameter:

Vswr:

SMA Series Socket 4 Hole Flange

Radio Frequency Connectors

SMA Series 12.80mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm >27.2Kg >750V

>500 cycles 12.70mm

Male Flange Mount RF Connector

50Ohm >5000MOhm

Adapter ASTM D 1710

+165°C -65°C 8.60mm 0GHz 26.5GHz 0.38mm 1.94mm

335V

<1.30

// Product PDF Links

SMA Series Product Datasheet

// Product 3D CAD Model Links

RFSMAA4PCCC3D CAD Model