


Product Name // SMA Straight Jack RF Connector, Bulkhead
 [View Product Page](#)

* Representative product image only

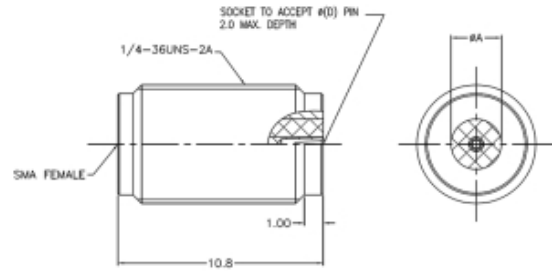

// Product Description:

- ⊗ SMA Straight Jack RF Connector, Bulkhead
- ⊗ Maximum Voltage: 335V
- ⊗ Temperature range: -65°C to +165°C
- ⊗ Frequency range: 0GHz - 26.5GHz
- ⊗ VSWR: <1.30
- ⊗ Dielectric withstanding Voltage: >750V
- ⊗ Impedance: 50Ohm
- ⊗ Body Material: Stainless Steel Passivation
- ⊗ Contact Material: Beryllium Copper

// General Information:

| | |
|----------------------------------|-----------------------------|
| Product Display Title: | SMA Series Bulkhead |
| Product Family: | Radio Frequency Connectors |
| Product Series: | SMA Series |
| Body Length: | 10.80mm |
| Body Material: | Stainless Steel Passivation |
| Centre Contact Retention Force: | >26.7N |
| Contact Pin Material: | Beryllium Copper |
| Min Coupling Torque: | 0.80Nm |
| Max Coupling Torque: | 1.10Nm |
| Coupling Nut Retention Force: | >27.2Kgf |
| Dielectric Withstanding Voltage: | >750V |
| Durability: | >500 cycles |
| Function: | Female RF Bulkhead |
| Impedance: | 50Ohm |
| Insulation Resistance: | >5000MOhm |
| Insulator: | Adapter ASTM D 1710 |
| Max Operating Temperature: | +165°C |
| Min Operating Temperature: | -65°C |
| Min Operating Frequency: | 0GHz |
| Max Operating Frequency: | 26.5GHz |
| Socket Diameter: | 0.38mm |
| Socket Outer Diameter: | 1.94mm |
| Thread Size: | 1/4 36UNS 2A |
| Voltage Max: | 335V |
| Vswr: | <1.30 |

// Product PDF Links

 [SMA Series Product Datasheet](#)

// Product 3D CAD Model Links

 [RFSMAAJC3D CAD Model](#)