RFSMAAJD Datasheet




Product Name // SMA Straight Jack RF Connector, **Bulkhead**



* Representative product image only



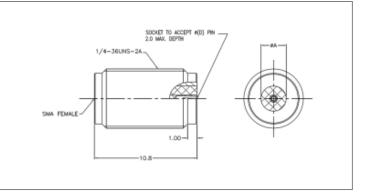

// Product Description:

- O SMA Straight Jack RF Connector, Bulkhead
- O Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 26.5GHz
- 0 VSWR: <1.30

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque: **Coupling Nut Retention Force:**

Dielectric Withstanding Voltage:

Durability:

Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature:

Min Operating Frequency: Max Operating Frequency:

Socket Diameter: Socket Outer Diameter:

Thread Size: Voltage Max:

Vswr:

SMA Series Bulkhead

Radio Frequency Connectors

SMA Series

10.80mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm

>27.2Kg

>750V

>500 cycles

Female RF Bulkhead

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C

0GHz

26.5GHz

0.46mm

2.59mm

1/4 36UNS 2A

335V

<1.30

// Product PDF Links



// Product 3D CAD Model Links



RFSMAAJD3D CAD Model