RFSSMAA2JCCAFEC Datasheet




Product Name // SSMA Straight Jack 2 Hole Flange RF Connector

View Product Page

* Representative product image only



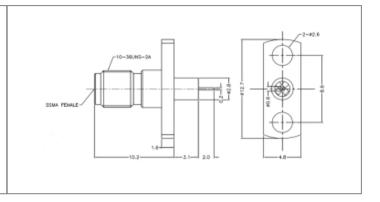

// Product Description:

- 0 SSMA Straight Jack 2 Hole Flange RF Connector
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 40GHz
- 0 VSWR: <1.30

- Dielectric withstanding Voltage: >500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Thread Size: Voltage Max:

SSMA Series Pin with Extended PTFE 2 Hole Flange

Radio Frequency Connectors

SSMA Series

10.20mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm

1.10Nm >500V

>500 cycles

12.70mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C

8.60mm

0GHz 40GHz

0.30mm

2.00mm

2.80mm

3.10mm

10 36UNS 2A

335V

<1.30

// Product PDF Links

Vswr:

SSMA Series Product Datasheet

// Product 3D CAD Model Links

RFSSMAA2JCCAFEC3D CAD Model