RFSSMAA4JAAA Datasheet




Product Name // SSMA Straight Jack 4 Hole Flange RF Connector



* Representative product image only



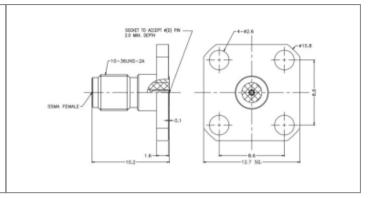

// Product Description:

- O SSMA Straight Jack 4 Hole Flange RF Connector
- Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: Product Series:

Is Vitalis: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Vswr:

Max Operating Temperature:
Min Operating Temperature:
Mount Hole Distance:
Min Operating Frequency:
Max Operating Frequency:
Socket Diameter:
Thread Size:
Voltage Max:

SSMA Series Socket 4 Hole Flange

Radio Frequency Connectors

SSMA Series

10.20mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm >500V >500 cycles 9.50mm

Female Flange Mount RF Connector

50Ohm >5000MOhm

Adapter ASTM D 1710

+165°C -65°C 6.35mm 0GHz 40GHz 0.23mm 10 36UNS 2A 335V <1.30

// Product PDF Links



// Product 3D CAD Model Links



RFSSMAA4JAAA3D CAD Model