## RFSSMAA4JAACFEC Datasheet




## Product Name // SSMA Straight Jack 4 Hole Flange RF Connector

View Product Page

\* Representative product image only



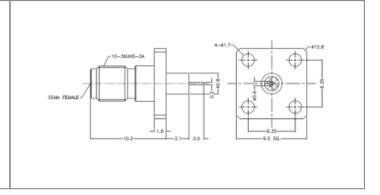

## // Product Description:

- 0 SSMA Straight Jack 4 Hole Flange RF Connector
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 40GHz
- 0 VSWR: <1.30

- Dielectric withstanding Voltage: >500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

## // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

**Body Length: Body Material:** 

**Centre Contact Retention Force:** 

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

**Durability:** 

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Thread Size: Voltage Max:

SSMA Series Pin with Extended PTFE 4 Hole Flange

Radio Frequency Connectors

SSMA Series

10.20mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm

>500V

>500 cycles

9.50mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C

6.35mm 0GHz

40GHz 0.60mm

2.00mm 2.80mm

3.10mm 10 36UNS 2A

335V

<1.30

// Product PDF Links

Vswr:

SSMA Series Product Datasheet

// Product 3D CAD Model Links

RFSSMAA4JAACFEC3D CAD Model