RFSSMAA4JCCD Datasheet




Product Name // SSMA Straight Jack 4 Hole Flange RF Connector

View Product Page

* Representative product image only



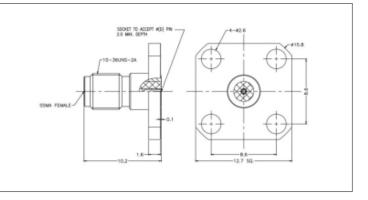

// Product Description:

- SSMA Straight Jack 4 Hole Flange RF Connector
- O Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 40GHz
- 0 VSWR: <1.30

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title: Product Family: Product Series: Body Length: **Body Material:**

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Vswr:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter: Thread Size: Voltage Max:

SSMA Series Socket 4 Hole Flange

Radio Frequency Connectors SSMA Series

10.20mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm

1.10Nm >500V

>500 cycles

12.70mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C 8.60mm 0GHz 40GHz 0.46mm 10 36UNS 2A 335V

<1.30

// Product PDF Links

SSMA Series Product Datasheet

// Product 3D CAD Model Links



RFSSMAA4JCCD3D CAD Model