# RFTERM240J1W Datasheet




# Product Name // 2.40mm Jack Termination (1W)

**View Product Page** 

\* Representative product image only



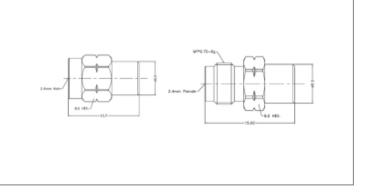

## // Product Description:

- O 2.40mm Jack Termination (1W)
- 0 Maximum Voltage: 335V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 50GHz
- 0 VSWR: <1.30

- O Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

# **General Information:**

**Product Display Title:** 

**Product Family:** 

**Product Series:** Average Power:

Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr:

RF Termination Series 2.40mm

Radio Frequency Connectors

**RF Termination Series** 

<1W

15.00mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Female RF Termination

500hm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 0GHz

50GHz M7x0.75 6g

335V

<1.30

### // Product PDF Links



RF Termination Series Product...

### // Product 3D CAD Model Links



RFTERM240J1W3D CAD Model