# RFTERM240P1W Datasheet




# Product Name // 2.40mm Plug Termination (1W)

View Product Page

\* Representative product image only



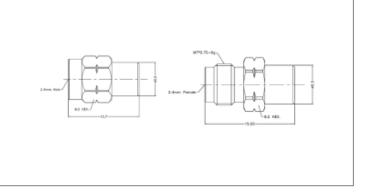

#### // Product Description:

- 2.40mm Plug Termination (1W)
- Maximum Voltage: 335V
- O Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 50GHz
- O VSWR: <1.30

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

## // General Information:

Product Display Title:

Product Family:

Product Series:

Average Power:

Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature:

Min Operating Frequency:

Max Operating Frequency:

Voltage Max:

Vswr:

RF Termination Series 2.40mm

Radio Frequency Connectors

RF Termination Series

<1W

13.70mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Male RF Termination

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C

-40°C 0GHz

50GHz

335V

<1.30

## // Product PDF Links



RF Termination Series Product...

// Product 3D CAD Model Links



RFTERM240P1W3D CAD Model