RFTERM292J05W Datasheet




Product Name // 2.92mm Jack Termination (0.5W)

View Product Page

* Representative product image only



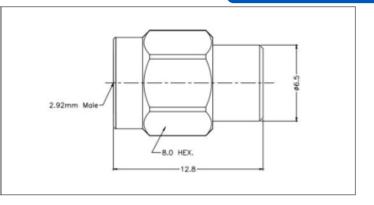

// Product Description:

- 2.92mm Jack Termination (0.5W)
- Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- Frecuency range: 0GHz 40GHz
- O VSWR: <1.20

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series: Is Vitalis:

Average Power: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr:

RF Termination Series 2.92mm

Radio Frequency Connectors

RF Termination Series

No < 0.5W 12.20mm

Stainless Steel Passivation

>26.7N

Beryllium Copper >750V

>500 cycles

Female RF Termination

500hm >5000MOhm

UNFILLED ULTEM 1000/PEI

+165°C -65°C 0GHz 40GHz 1/4 36UNS 2A 335V

<1.20

// Product PDF Links



RF Termination Series Product...

// Product 3D CAD Model Links



RFTERM292J05W3D CAD Model