# RFTERM292J05W Datasheet




# Product Name // 2.92mm Jack Termination (0.5W)

**View Product Page** 

\* Representative product image only



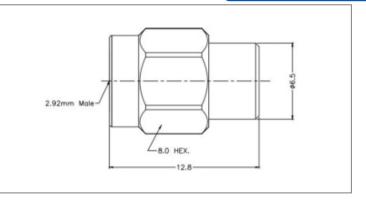

## // Product Description:

- O 2.92mm Jack Termination (0.5W)
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 40GHz
- 0 VSWR: <1.20

- O Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

# **General Information:**

**Product Display Title:** 

**Product Family:** 

**Product Series:** Average Power:

Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr:

RF Termination Series 2.92mm

Radio Frequency Connectors

**RF Termination Series** 

<0.5W

12.20mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Female RF Termination

500hm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+165°C -65°C 0GHz 40GHz

1/4 36UNS 2A

335V <1.20

### // Product PDF Links



RF Termination Series Product...

### // Product 3D CAD Model Links



RFTERM292J05W3D CAD Model