
# **RFTERM292J1W** Datasheet



## Product Name // 2.92mm Jack Termination (1W)

View Product Page

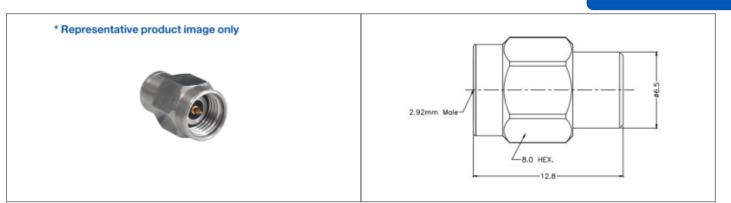

## // Product Description:

- O 2.92mm Jack Termination (1W)
- O Maximum Voltage: 335V
- O Temperature range: -55°C to +125°C
- O Frecuency range: 0GHz 40GHz
- O VSWR: <1.25

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

### // General Information:

Product Display Title: **Product Family: Product Series:** Is Vitalis: Average Power: Body Length: **Body Material:** Centre Contact Retention Force: Contact Pin Material: **Dielectric Withstanding Voltage:** Durability: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Thread Size: Voltage Max: Vswr:

**RF** Termination Series 2.92mm **Radio Frequency Connectors RF** Termination Series No <1W 12.20mm Stainless Steel Passivation >26.7N Beryllium Copper >750V >500 cycles Female RF Termination 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +125°C -55°C 0GHz 40GHz 1/4 36UNS 2A 335V <1.25

#### // Product PDF Links

RF Termination Series Product...

// Product 3D CAD Model Links

RFTERM292J1W3D CAD Model