RFTERM292P1W Datasheet




Product Name // 2.92mm Plug Termination (1W)

View Product Page

* Representative product image only



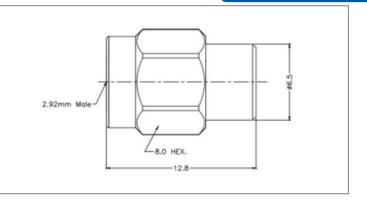

// Product Description:

- 2.92mm Plug Termination (1W)
- Maximum Voltage: 335V
- O Temperature range: -55°C to +125°C
- Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series: Average Power:

Average Power

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature:

Min Operating Frequency: Max Operating Frequency:

Voltage Max:

Vswr:

RF Termination Series 2.92mm

Radio Frequency Connectors

RF Termination Series

<1W

12.80mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Male RF Termination

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+125°C

-55°C 0GHz

40GHz

335V

<1.25

// Product PDF Links



DE Tamaination Codes Duadout

// Product 3D CAD Model Links



RFTERM292P1W3D CAD Model