# RFTERM350J2W Datasheet




### Product Name // 3.5mm Jack Termination (2W)

**View Product Page** 

\* Representative product image only



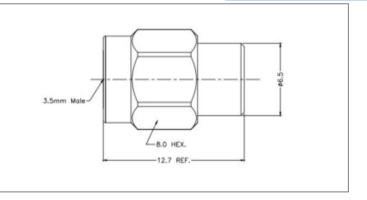

#### // Product Description:

- O 3.5mm Jack Termination (2W)
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 27GHz
- 0 VSWR: <1.20

- O Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### **General Information:**

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

Average Power:

Body Length: **Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr:

RF Termination Series 3.50mm

Radio Frequency Connectors

**RF** Termination Series

<2W

12.20mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Female RF Termination

500hm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+165°C -65°C

0GHz 27GHz

1/4 36UNS 2A

335V

<1.20

## // Product PDF Links



RF Termination Series Product...

// Product 3D CAD Model Links



RFTERM350J2W3D CAD Model