RFTERM350P2W Datasheet




Product Name // 3.5mm Plug Termination (2W)

View Product Page

* Representative product image only



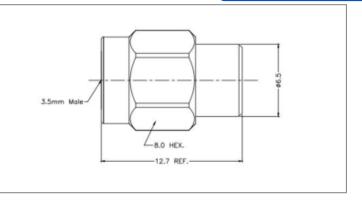

Product Description:

- 0 3.5mm Plug Termination (2W)
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 27GHz
- 0 VSWR:

- 0 Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series:

Average Power:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature:

Min Operating Frequency:

Max Operating Frequency: Voltage Max:

Vswr:

RF Termination Series 3.50mm

Radio Frequency Connectors

RF Termination Series

<2W

12.80mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Male RF Termination

500hm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+165°C

-65°C

0GHz 27GHz

335V <1.20

// Product PDF Links



// Product 3D CAD Model Links



RFTERM350P2W3D CAD Model