
RFTERMNJ2W Datasheet



Product Name // N Type Jack Termination (2W)

View Product Page



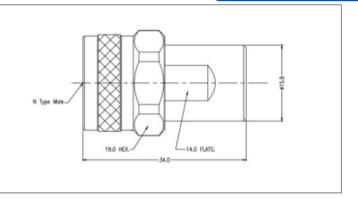

// Product Description:

- 0 N Type Jack Termination (2W)
- 0 Maximum Voltage: 500V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR: <1.15

- O Dielectric withstanding Voltage: >1500V
- 0 Impedance: 500hm

RF Termination Series N Type

Radio Frequency Connectors

Stainless Steel Passivation

RF Termination Series

No

<2W 35.00mm

>26.7N

>1500V

50Ohm

+85°C

-40°C

>500 cycles

>5000MOhm

Beryllium Copper

Female RF Termination

UNFILLED ULTEM 1000/PEI

- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family: Product Series:

Is Vitalis:

Average Power:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Voltage Max: Vswr:

Max Operating Temperature:

0GHz 18GHz 500V <1.15

// Product 3D CAD Model Links

RFTERMNJ2W3D CAD Model

