
RFTERMNJ2W Datasheet



Product Name // N Type Jack Termination (2W)

View Product Page



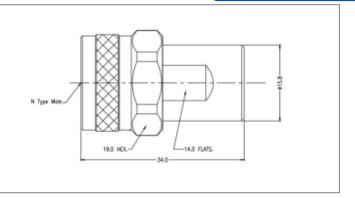

// Product Description:

- O N Type Jack Termination (2W)
- Maximum Voltage: 500V
- O Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 18GHz
- O VSWR: <1.15

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series: Average Power:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature:

Min Operating Frequency: Max Operating Frequency:

Voltage Max:

Vswr:

RF Termination Series N Type

Radio Frequency Connectors

RF Termination Series

<2W

35.00mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>1500V

>500 cycles

Female RF Termination

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C

-40°C 0GHz

18GHz

500V

<1.15

// Product PDF Links



Township Coules Duadout

// Product 3D CAD Model Links



RFTERMNJ2W3D CAD Model