


# RFTERMNP2W Datasheet

## Product Name // N Type Plug Termination (2W)

[View Product Page](#)

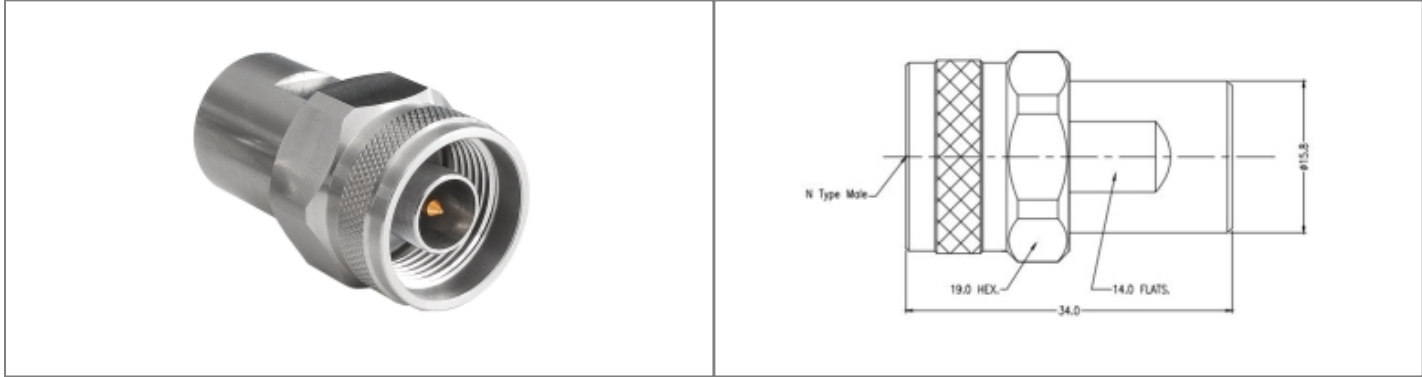

### // Product Description:

- ⊕ N Type Plug Termination (2W)
- ⊕ Maximum Voltage: 500V
- ⊕ Temperature range: -40°C to +85°C
- ⊕ Frequency range: 0GHz - 18GHz
- ⊕ VSWR: <1.15
- ⊕ Dielectric withstanding Voltage: >1500V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

### // General Information:

Product Display Title:	RF Termination Series N Type
Product Family:	Radio Frequency Connectors
Product Series:	RF Termination Series
Average Power:	<2W
Body Length:	34.00mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>1500V
Durability:	>500 cycles
Function:	Male RF Termination
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	UNFILLED ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Voltage Max:	500V
Vswr:	<1.15

**// Product PDF Links**

[RF Termination Series Product...](#)

**// Product 3D CAD Model Links**

[RFTERMNP2W3D CAD Model](#)