
# **RFTERMNP2W** Datasheet



## Product Name // N Type Plug Termination (2W)

🚯 View Product Page

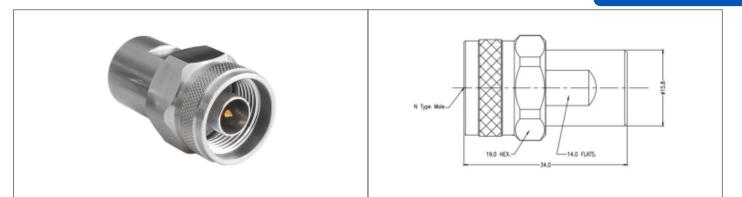

### // Product Description:

- O N Type Plug Termination (2W)
- O Maximum Voltage: 500V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 18GHz
- O VSWR:

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

### // General Information:

Product Display Title: **Product Family:** Product Series: Average Power: Body Length: **Body Material:** Centre Contact Retention Force: Contact Pin Material: **Dielectric Withstanding Voltage:** Durability: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Voltage Max: Vswr:

RF Termination Series N Type Radio Frequency Connectors **RF** Termination Series <2W 34.00mm Stainless Steel Passivation >26.7N Beryllium Copper >1500V >500 cycles Male RF Termination 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 0GHz 18GHz 500V <1.15

#### // Product PDF Links

RF Termination Series Product...

// Product 3D CAD Model Links

RFTERMNP2W3D CAD Model