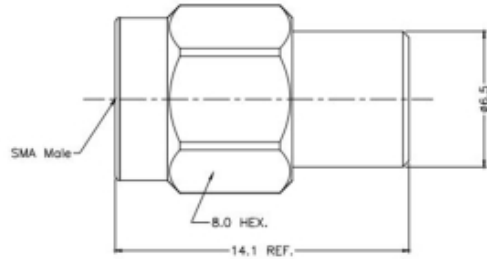


Product Name // SMA Jack Termination (2W)
 [View Product Page](#)

* Representative product image only

**// Product Description:**

- ⊞ SMA Jack Termination (2W)
- ⊞ Maximum Voltage: 335V
- ⊞ Temperature range: -65°C to +165°C
- ⊞ Frequency range: 0GHz - 18GHz
- ⊞ VSWR:
- ⊞ Dielectric withstanding Voltage: >750V
- ⊞ Impedance: 50Ohm
- ⊞ Body Material: Stainless Steel Passivation
- ⊞ Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Termination Series SMA
Product Family:	Radio Frequency Connectors
Product Series:	RF Termination Series
Average Power:	<2W
Body Length:	12.20mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female RF Termination
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Thread Size:	1/4 36UNS 2A
Voltage Max:	335V
Vswr:	<1.20

// Product PDF Links
 [RF Termination Series Product...](#)
// Product 3D CAD Model Links
 [RFTERMSMAJ2W3D CAD Model](#)