
RFTERMSMAP1W Datasheet



Product Name // SMA Plug Termination (1W)

View Product Page



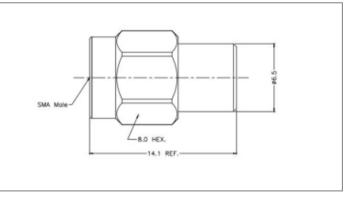

// Product Description:

- O SMA Plug Termination (1W)
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR: <1.15

- O Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series:

Is Vitalis:

Average Power:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Voltage Max:

Vswr:

RF Termination Series SMA

Radio Frequency Connectors

RF Termination Series

No

<1W

14.10mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Male RF Termination

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C

0GHz

18GHz 335V

<1.15

// Product PDF Links



RF Termination Series Product...

// Product 3D CAD Model Links



RFTERMSMAP1W3D CAD Model