
## RFTERMSMAP1W Datasheet



## **Product Name // SMA Plug Termination (1W)**

**View Product Page** 



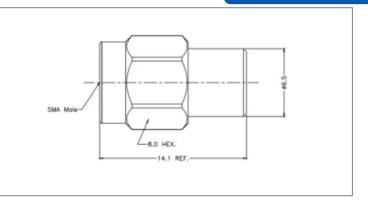

## // Product Description:

- O SMA Plug Termination (1W)
- Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 18GHz
- O VSWR: <1.15

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

## // General Information:

Product Display Title:

Product Family:

Product Series: Average Power:

Average Powe

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature:

Min Operating Frequency:

Max Operating Frequency: Voltage Max:

Vswr:

RF Termination Series SMA

Radio Frequency Connectors

RF Termination Series

<1W

14.10mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Male RF Termination

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C

-65°C 0GHz

18GHz

335V <1.15

// Product PDF Links

₽ RF

Townia stick Codes Duadret

// Product 3D CAD Model Links



RFTERMSMAP1W3D CAD Model