# **RFTERMSMAP2W Datasheet**




## Product Name // SMA Plug Termination (2W)

View Product Page

\* Representative product image only



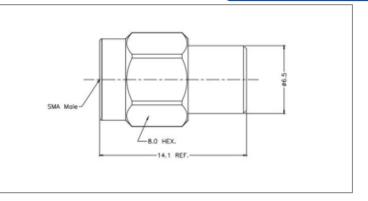

### // Product Description:

- O SMA Plug Termination (2W)
- Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- Frecuency range: 0GHz 18GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

### // General Information:

Product Display Title:

Product Family:

Product Series:

Average Power:

Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature:

Min Operating Frequency: Max Operating Frequency:

Voltage Max:

Vswr:

RF Termination Series SMA

Radio Frequency Connectors

RF Termination Series

<2W

12.70mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Male RF Termination

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C

-65°C 0GHz

18GHz

335V

<1.20

#### // Product PDF Links



NE Tamaination Carina Duadret

// Product 3D CAD Model Links



RFTERMSMAP2W3D CAD Model