RFTNCAA4JCCF Datasheet




Product Name // TNCA Jack Straight 4 Hole Flange RF Connector

View Product Page

* Representative product image only



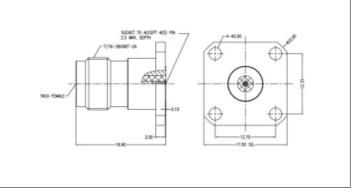

// Product Description:

- O TNCA Jack Straight 4 Hole Flange RF Connector
- Maximum Voltage: 500V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR: <1.30

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title: Product Family: Product Series: Body Length: **Body Material:**

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter: Thread Size:

Voltage Max: Vswr:

TNCA Series Socket 4 Hole Flange Radio Frequency Connectors

TNCA Series 18.90mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm >1500V >500 cycles 12.70mm

Female Flange Mount RF Connector

50Ohm >5000MOhm Adapter ASTM D 1710

+165°C -65°C 8.60mm 0GHz 18GHz 0.91mm 7/16 28UNEF 2A

500V

<1.30

// Product PDF Links



TNCA Series Product Datasheet

// Product 3D CAD Model Links



RFTNCAA4JCCF3D CAD Model