# **RFTNCAA4JCCMF Datasheet**




# Product Name // TNCA Jack Straight 4 Hole Flange RF Connector

View Product Page

# \* Representative product image only



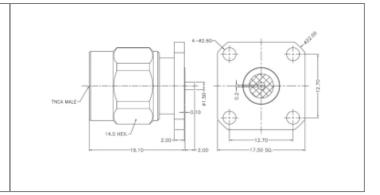

#### // Product Description:

- 0 TNCA Jack Straight 4 Hole Flange RF Connector
- 0 Maximum Voltage: 500V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 11GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >1500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation

TNCA Series Pin without Extended PTFE 4 Hole Flange

0 Contact Material: Beryllium Copper

# // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque:

Dielectric Withstanding Voltage:

**Durability:** 

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature: Mount Hole Distance:

Min Operating Frequency:

Max Operating Frequency:

Pin Diameter: Pin Length:

Pin Slot Width:

Thread Size:

Voltage Max: Vswr:

Body Length:

**TNCA Series** 

18.90mm

Stainless Steel Passivation

Radio Frequency Connectors

>26.7N

Beryllium Copper 0.80Nm

1.10Nm

>1500V

>500 cycles

12.70mm

Female Flange Mount RF Connector

500hm

>5000MOhm

Adapter ASTM D 1710

+165°C

-65°C 8.60mm

0GHz

11GHz

1.50mm 2.00mm

0.20mm

7/16 28UNEF 2A

500V

<1.30

# // Product PDF Links



TNCA Series Product Datasheet

# // Product 3D CAD Model Links



RFTNCAA4JCCMF3D CAD Model