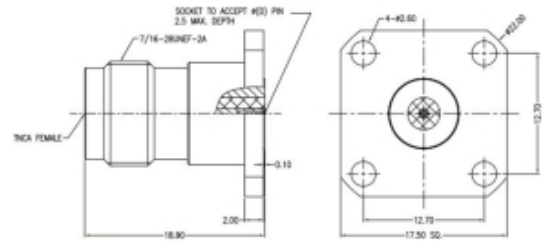


Product Name // TNCA Jack Straight 4 Hole Flange RF Connector
[View Product Page](#)

// Product Description:

- ⊞ TNCA Jack Straight 4 Hole Flange RF Connector
- ⊞ Maximum Voltage: 500V
- ⊞ Temperature range: -65°C to +165°C
- ⊞ Frequency range: 0GHz - 18GHz
- ⊞ VSWR: <1.30
- ⊞ Dielectric withstanding Voltage: >1500V
- ⊞ Impedance: 50Ohm
- ⊞ Body Material: Stainless Steel Passivation
- ⊞ Contact Material: Beryllium Copper

// General Information:

| | |
|----------------------------------|----------------------------------|
| Product Display Title: | TNCA Series Socket 4 Hole Flange |
| Product Family: | Radio Frequency Connectors |
| Product Series: | TNCA Series |
| Body Length: | 18.90mm |
| Body Material: | Stainless Steel Passivation |
| Centre Contact Retention Force: | >26.7N |
| Contact Pin Material: | Beryllium Copper |
| Min Coupling Torque: | 0.80Nm |
| Max Coupling Torque: | 1.10Nm |
| Dielectric Withstanding Voltage: | >1500V |
| Durability: | >500 cycles |
| Flange Mount Length: | 17.50mm |
| Function: | Female Flange Mount RF Connector |
| Impedance: | 50Ohm |
| Insulation Resistance: | >5000MOhm |
| Insulator: | Adapter ASTM D 1710 |
| Max Operating Temperature: | +165°C |
| Min Operating Temperature: | -65°C |
| Mount Hole Distance: | 12.70mm |
| Min Operating Frequency: | 0GHz |
| Max Operating Frequency: | 18GHz |
| Socket Diameter: | 0.91mm |
| Thread Size: | 7/16 28UNEF 2A |
| Voltage Max: | 500V |
| Vswr: | <1.30 |

// Product PDF Links
[TNCA Series Product Datasheet](#)
// Product 3D CAD Model Links
[RFTNCAA4JFHF3D CAD Model](#)