
RFTNCAA4JFHMF Datasheet



Product Name // TNCA Jack Straight 4 Hole Flange RF Connector

View Product Page



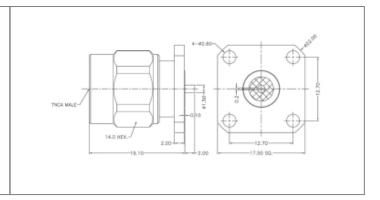

// Product Description:

- 0 TNCA Jack Straight 4 Hole Flange RF Connector
- 0 Maximum Voltage: 500V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 11GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >1500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque:

Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency:

Max Operating Frequency:

Pin Diameter: Pin Length: Pin Slot Width: Thread Size:

Voltage Max: Vswr:

TNCA Series Pin without Extended PTFE 4 Hole Flange

Radio Frequency Connectors

TNCA Series

18.90mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm >1500V

>500 cycles 17.50mm

Female Flange Mount RF Connector

500hm >5000MOhm

Adapter ASTM D 1710

+165°C -65°C 12.70mm 0GHz 11GHz 1.50mm 2.00mm 0.20mm

7/16 28UNEF 2A

500V <1.30

// Product PDF Links

TNCA Series Product Datasheet

// Product 3D CAD Model Links

RFTNCAA4JFHMF3D CAD Model