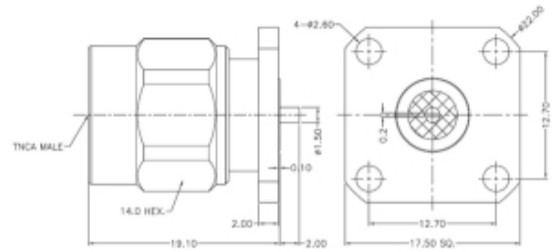


Product Name // TNCA Plug Straight 4 Hole Flange RF Connector
[View Product Page](#)

* Representative product image only


// Product Description:

- ⊕ TNCA Plug Straight 4 Hole Flange RF Connector
- ⊕ Maximum Voltage: 500V
- ⊕ Temperature range: -65°C to +165°C
- ⊕ Frequency range: 0GHz - 11GHz
- ⊕ VSWR: <1.30
- ⊕ Dielectric withstanding Voltage: >1500V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

// General Information:

Product Display Title:	TNCA Series Pin without Extended PTFE 4 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	TNCA Series
Body Length:	19.10mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>1500V
Durability:	>500 cycles
Flange Mount Length:	17.50mm
Function:	Male Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Mount Hole Distance:	12.70mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	11GHz
Pin Diameter:	1.50mm
Pin Length:	2.00mm
Pin Slot Width:	0.20mm
Voltage Max:	500V
Vswr:	<1.30

// Product PDF Links
[!\[\]\(95b425611cbd2b8716a140cf67c81822_img.jpg\) TNCA Series Product Datasheet](#)
// Product 3D CAD Model Links
[!\[\]\(4f6bf54ae7e4144a72d78316053e412d_img.jpg\) RFTNCAA4PFHMF3D CAD Model](#)