RFTNCAA4PFHMF Datasheet




Product Name // TNCA Plug Straight 4 Hole Flange RF Connector

View Product Page

* Representative product image only



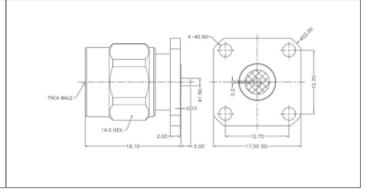

// Product Description:

- TNCA Plug Straight 4 Hole Flange RF Connector 0
- Maximum Voltage: 500V
- O Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 11GHz
- O VSWR:

- O Dielectric withstanding Voltage: >1500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature: Mount Hole Distance:

Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length:

Pin Slot Width: Voltage Max: Vswr:

TNCA Series Pin without Extended PTFE 4 Hole Flange

Radio Frequency Connectors

TNCA Series

19.10mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm

>1500V

>500 cycles

17.50mm

Male Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C

-65°C

12.70mm 0GHz

11GHz

1.50mm

2.00mm 0.20mm

500V

<1.30

// Product PDF Links



TNCA Series Product Datasheet

// Product 3D CAD Model Links



RFTNCAA4PFHMF3D CAD Model