

Y series Push-Pull connectors offer a solution for outdoor applications. The Push-Pull latching mechanism provides a secure connection whilst the density of the contacts provides considerable panel space savings.

All models of this series are waterproof and watertight when mated to give a protection index of IP66 (in mated condition). The ruggedized design combined with precision manufacturing offers excellent durability, reliability and quality.



Key Features:


- | | |
|---|--|
| ⬡ Multiple contacts from 2 to 30 | ⬡ Rugged housing for extreme working conditions; watertight connection |
| ⬡ IP66 rated | ⬡ Solder contacts (Straight Plug and Fixed Socket) |
| ⬡ 360-degree screening for full EMC shielding | ⬡ High packing density for space savings |
| ⬡ Keying system (G key standard) for connector alignment | ⬡ Security of the Push-Pull latching system |
| ⬡ Multiple key features to avoid cross mating of similar connectors | ⬡ >4500 cycles |

0Y Series Fixed Socket



PPCEGG0K

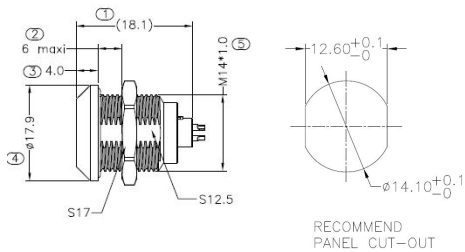- Available in 2, 3, 4, 5, 6, 7 & 9 contacts
- Nut Installation torque 5.0Nm
- Max Panel Thickness 6.0mm
- Temp: -50 C to +200 C
- Solder Terminals
- Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- Available in Straight Plug version




Part Number	Contact Number	Terminal Diameter	Test Voltage Pin-Pin	Test Voltage Pin-Shell	Rated Current	Wire Range Sizes (AWG)
PPCEGG0K02CLL	02	0.9mm	1300V	1050V	10A	22 max
PPCEGG0K03CLL	03	0.9mm	1200V	900V	8A	22 max
PPCEGG0K04CLL	04	0.7mm	850V	700V	7A	22 max
PPCEGG0K05CLL	05	0.7mm	1000V	700V	6.5A	22 max
PPCEGG0K06CLL	06	0.5mm	850V	650V	2.5A	28 max
PPCEGG0K07CLL	07	0.5mm	800V	700V	2.5A	28 max
PPCEGG0K09CLL	09	0.5mm	600V	600V	2A	28 max

0Y Series Straight Plug



PPCFGG0K

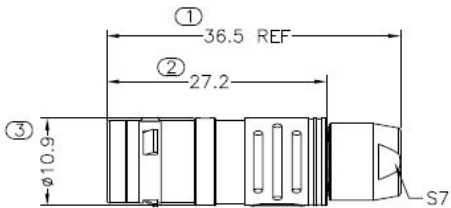- Available in 2, 3, 4, 5, 6, 7 & 9 contacts
- Temp: -50 C to +200 C
- Solder Terminals
- Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- Available in Fixed Socket version




Part Number	Contact Number	Terminal Diameter	Test Voltage Pin-Pin	Test Voltage Pin-Shell	Rated Current	Cable OD (mm)	Wire Range Sizes (AWG)
PPCFGG0K02CLAD	02	0.9mm	1300V	1050V	10A	4.6-5.0	22 max
PPCFGG0K03CLAD	03	0.9mm	1200V	900V	8A	4.6-5.0	22 max
PPCFGG0K04CLAD	04	0.7mm	850V	700V	7A	4.6-5.0	22 max
PPCFGG0K05CLAD	05	0.7mm	1000V	700V	6.5A	4.6-5.0	22 max
PPCFGG0K06CLAD	06	0.5mm	850V	650V	2.5A	4.6-5.0	28 max
PPCFGG0K07CLAD	07	0.5mm	800V	700V	2.5A	4.6-5.0	28 max
PPCFGG0K09CLAD	09	0.5mm	600V	500V	2A	4.6-5.0	28 max

1Y Series Fixed Socket



PPCEGG1K

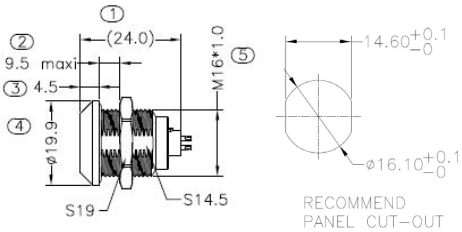- Available in 2, 3, 4, 5, 6, 7, 8, 10, 12, 14 & 16 contacts
- Nut Installation torque 7.0Nm
- Max Panel Thickness 9.5mm
- Temp: -50 C to +200 C
- Solder Terminals
- Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- Available in Straight Plug version




Part Number	Contact Number	Terminal Diameter	Test Voltage Pin-Pin	Test Voltage Pin-Shell	Rated Current	Wire Range Sizes (AWG)
PPCEGG1K02CLL	02	1.3mm	1500V	1350V	15A	20 max
PPCEGG1K03CLL	03	1.3mm	1300V	1550V	12A	20 max
PPCEGG1K04CLL	04	0.9mm	1350V	1450V	10A	22 max
PPCEGG1K05CLL	05	0.9mm	1250V	1150V	9A	22 max
PPCEGG1K06CLL	06	0.7mm	1050V	1200V	7A	22 max
PPCEGG1K07CLL	07	0.7mm	950V	1050V	7A	22 max
PPCEGG1K08CLL	08	0.7mm	950V	1150V	5A	22 max
PPCEGG1K10CLL	10	0.5mm	900V	1500V	2.5A	28 max
PPCEGG1K12CLL	12	0.5mm	800V	1200V	2A	28 max
PPCEGG1K14CLL	14	0.5mm	800V	1200V	2A	28 max
PPCEGG1K16CLL	16	0.5mm	800V	950V	1.5A	28 max

1Y Series Straight Plug



PPCFGG1K

- Available in 2, 3, 4, 5, 6, 7, 8, 10, 12, 14 & 16 contacts
- Temp: -50 C to +200 C
- Solder Terminals
- Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- Available in Fixed Socket version




Part Number	Contact Number	Terminal Diameter	Test Voltage Pin-Pin	Test Voltage Pin-Shell	Rated Current	Cable OD (mm)	Wire Range Sizes (AWG)
PPCFGG1K02CLAD	02	0.9mm	1300V	1050V	10A	4.6-5.0	20 max
PPCFGG1K03CLAD	03	0.9mm	1200V	900V	8A	4.6-5.0	20 max
PPCFGG1K04CLAD	04	0.7mm	850V	700V	7A	4.6-5.0	22 max
PPCFGG1K05CLAD	05	0.7mm	1000V	700V	6.5A	4.6-5.0	22 max
PPCFGG1K06CLAD	06	0.5mm	850V	650V	2.5A	4.6-5.0	22 max
PPCFGG1K07CLAD	07	0.5mm	800V	700V	2.5A	5.6-6.0	22 max
PPCFGG1K08CLAD	09	0.5mm	600V	500V	2A	5.6-6.0	22 max
PPCEGG1K10CLL	10	0.5mm	900V	1500V	2.5A	5.6-6.0	28 max
PPCEGG1K12CLL	12	0.5mm	800V	1200V	2A	5.6-6.0	28 max
PPCEGG1K14CLL	14	0.5mm	800V	1200V	2A	6.6-7.0	28 max
PPCEGG1K16CLL	16	0.5mm	800V	950V	1.5A	6.6-7.0	28 max

2Y Series Fixed Socket



PPCEGG2K

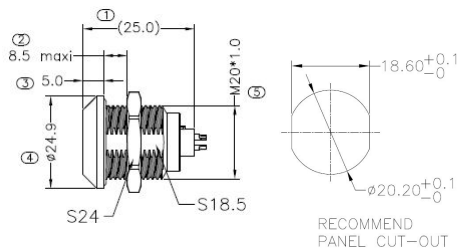- Available in 2, 3, 4, 5, 6, 7, 8, 10, 12, 14, 16, 18, 19 & 26 contacts
- Nut Installation torque 9.0Nm
- Max Panel Thickness 8.5mm
- Temp: -50 C to +200 C
- Solder Terminals
- Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- Available in Straight Plug version




Part Number	Contact Number	Terminal Diameter	Test Voltage Pin-Pin	Test Voltage Pin-Shell	Rated Current	Wire Range Sizes (AWG)
PPCEGG2K02CLL	02	2mm	2100V	1750V	30A	16 max
PPCEGG2K03CLL	03	1.6mm	2400V	1850V	17A	16 max
PPCEGG2K04CLL	04	1.3mm	1850V	1850V	15A	20 max
PPCEGG2K05CLL	05	1.3mm	1750V	1600V	14A	20 max
PPCEGG2K06CLL	06	1.3mm	1350V	1450V	12A	20 max
PPCEGG2K07CLL	07	1.3mm	1750V	1600V	11A	20 max
PPCEGG2K08CLL	08	0.9mm	1500V	1250V	10A	22 max
PPCEGG2K10CLL	10	0.9mm	1450V	1300V	8A	22 max
PPCEGG2K12CLL	12	0.7mm	1250V	1350V	7A	22 max
PPCEGG2K14CLL	14	0.7mm	1150V	1350V	6.5A	22 max
PPCEGG2K16CLL	16	0.7mm	950V	1250V	6A	22 max
PPCEGG2K18CLL	18	0.7mm	850V	1200V	5.5A	22 max
PPCEGG2K19CLL	19	0.7mm	950V	1250V	5A	22 max
PPCEGG2K26CLL	26	0.5mm	950V	1250V	2A	28 max

2Y Series Straight Plug



PPCFG2K

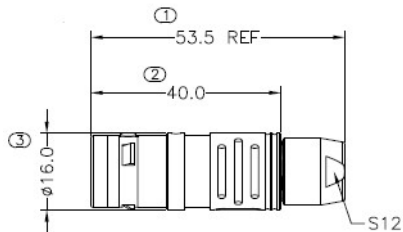- Available in 2, 3, 4, 5, 6, 7, 8, 10, 12, 14, 16, 18, 19 & 26 contacts
- Temp: -50 C to +200 C
- Solder Terminals
- Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- Available in Fixed Socket version




Part Number	Contact Number	Terminal Diameter	Test Voltage Pin-Pin	Test Voltage Pin-Shell	Rated Current	Cable OD (mm)	Wire Range Sizes (AWG)
PPCFG2K02CLAD	02	2mm	2100V	1750V	30A	4.6-5.0	16 max
PPCFG2K03CLAD	03	1.6mm	2400V	1850V	17A	4.6-5.0	16 max
PPCFG2K04CLAD	04	1.3mm	1850V	1850V	15A	4.6-5.0	20 max
PPCFG2K05CLAD	05	1.3mm	1750V	1600V	14A	4.6-5.0	20 max
PPCFG2K06CLAD	06	1.3mm	1350V	1450V	12A	4.6-5.0	20 max
PPCFG2K07CLAD	07	1.3mm	1750V	1600V	11A	4.6-5.0	20 max
PPCFG2K08CLAD	08	0.9mm	1500V	1250V	10A	5.6-6.0	22 max
PPCFG2K10CLAD	10	0.7mm	1450V	1300V	8A	5.6-6.0	22 max
PPCFG2K12CLAD	12	0.7mm	1250V	1350V	7A	5.6-6.0	22 max
PPCFG2K14CLAD	14	0.7mm	1150V	1350V	6.5A	6.6-7.0	22 max
PPCFG2K16CLAD	16	0.7mm	950V	1250V	6A	6.6-7.0	22 max
PPCFG2K18CLAD	18	0.7mm	950V	1200V	5.5A	7.6-8.0	22 max
PPCFG2K19CLAD	19	0.7mm	950V	1250V	5A	7.6-8.0	22 max
PPCFG2K26CLAD	26	0.5mm	950V	1300V	2A	8.6-9.0	28 max

3Y Series Fixed Socket



PPCEGG3K

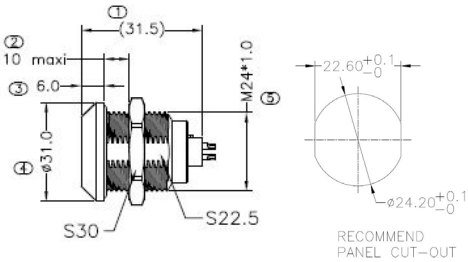- Available in 2, 3, 4, 5, 6, 7, 8, 10, 12, 14, 16, 18, 19, 20, 22, 24, 26 & 30 contacts
- Nut Installation torque 12Nm
- Max Panel Thickness 10.0mm
- Temp: -50 C to +200 C
- Solder Terminals
- Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- Available in Straight Plug version




Part Number	Contact Number	Terminal Diameter	Test Voltage Pin-Pin	Test Voltage Pin-Shell	Rated Current	Wire Range Sizes (AWG)
PPCEGG3K02CLL	02	3mm	2100V	1550V	35A	12 max
PPCEGG3K03CLL	03	2mm	1900V	1500V	25A	14 max
PPCEGG3K04CLL	04	2mm	1450V	1250V	19A	14 max
PPCEGG3K05CLL	05	1.6mm	1900V	1250V	19A	16 max
PPCEGG3K06CLL	06	1.6mm	1600V	1150V	17A	16 max
PPCEGG3K07CLL	07	1.6mm	1700V	1250V	15A	16 max
PPCEGG3K08CLL	08	1.3mm	1650V	1150V	13A	20 max
PPCEGG3K09CLL	09	1.3mm, 2.0mm	1350V	1050V	6.0A, 15.0A	20 max, 14 max
PPCEGG3K10CLL	10	1.3mm	1250V	900V	12A	20 max
PPCEGG3K12CLL	12	0.9mm	1450V	1000V	9A	22 max
PPCEGG3K14CLL	14	0.9mm	1200V	1200V	9A	22 max
PPCEGG3K16CLL	16	0.9mm	1200V	850V	8A	22 max
PPCEGG3K18CLL	18	0.9mm	1200V	1050V	7A	22 max
PPCEGG3K20CLL	20	0.7mm	1000V	900V	6A	22 max
PPCEGG3K22CLL	22	0.7mm	1000V	900V	5.5A	22 max
PPCEGG3K24CLL	24	0.7mm	950V	800V	4A	22 max
PPCEGG3K26CLL	26	0.7mm	950V	700V	4A	22 max
PPCEGG3K30CLL	30	0.7mm	800V	700V	3.5A	22 max

3Y Series Straight Plug



PPCFGG3K

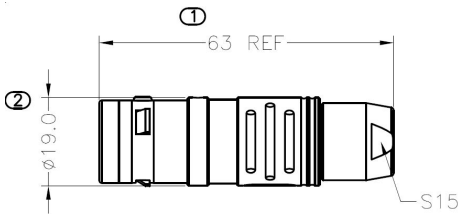- Available in 2, 3, 4, 5, 6, 7, 8, 10, 12, 14, 16, 18, 19, 20, 22, 24, 26 & 30 contacts
- Temp: -50 C to +200 C
- Solder Terminals
- Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- Available in Fixed Socket version



Part Number	Contact Number	Terminal Diameter	Test Voltage Pin-Pin	Test Voltage Pin-Shell	Rated Current	Cable OD (mm)	Wire Range Sizes (AWG)
PPCFGG3K02CLAD	02	3mm	2100V	1550V	35A	6.6-7.0	12 max
PPCFGG3K03CLAD	03	2mm	1900V	1500V	25A	6.6-7.0	12 max
PPCFGG3K04CLAD	04	2mm	1450V	1250V	19A	6.6-7.0	14 max
PPCFGG3K05CLAD	05	1.6mm	1900V	1250V	19A	6.6-7.0	14 max
PPCFGG3K06CLAD	06	1.6mm	1600V	1150V	17A	6.6-7.0	16 max
PPCFGG3K07CLAD	07	1.6mm	1700V	1250V	15A	6.6-7.0	16 max
PPCFGG3K08CLAD	08	1.3mm	1650V	1150V	13A	6.6-7.0	20 max
PPCFGG3K09CLAD	09	1.3mm, 2.0mm	1350V, 1350V	1050V, 1050V	6A, 15A	6.6-7.0	20 max, 14 max
PPCFGG3K10CLAD	10	1.3mm	1250V	900V	12A	6.6-7.0	20 max
PPCFGG3K12CLAD	12	0.9mm	1450V	1000V	9A	6.6-7.0	22 max
PPCFGG3K14CLAD	14	0.9mm	1200V	1200V	9A	7.6-8.0	22 max
PPCFGG3K16CLAD	16	0.9mm	1200V	850V	8A	7.6-8.0	22 max
PPCFGG3K18CLAD	18	0.9mm	1200V	1050V	7A	7.6-8.0	22 max
PPCFGG3K20CLAD	20	0.7mm	1000V	900V	6A	10.6-11.0	22 max
PPCFGG3K22CLAD	22	0.7mm	1000V	900V	5.5A	10.6-11.0	22 max
PPCFGG3K24CLAD	24	0.7mm	950V	800V	4A	10.6-11.0	22 max
PPCFGG3K26CLAD	26	0.7mm	950V	700V	4A	10.6-11.0	22 max
PPCFGG3K30CLAD	30	0.7mm	950V	700V	3.5A	10.6-11.0	22 max

Electrical:

Shielding efficiency at 10 MHz:	> 95 dB
Shielding efficiency at 1 GHz:	> 80 dB

Mechanical:







Endurance:	> 4500 cycles
Humidity:	up to 95% at 60° C
Temperature range:	-50° C, +200° C
Resistance to vibrations:	10-2000 Hz, 15 g
Shock resistance:	100 g, 6 ms
Salt spray corrosion test:	> 144h
Protection index (mated):	IP 66
Contact type:	Solder










Material:









Housing Material:	Brass chrome plated shell and nickel plated brass fixed ring (Fixed Socket Plug) brass chrome plated shell and collet nut, plated brass latch sleeve and mid pieces (Straight Plug)
Contact Plating:	Phosphor bronze gold plated 3u" (Fixed Socket Plug), Brass gold plated 3u" (Straight Plug)
Insulator:	PPS
RoHS:	Compliant








Note:

For the fields of the table have two values, the first value is for all the contacts apart from the contact in the centre. The second value is only applicable for the contact in the centre.

Contact Number:	Fixed Socket / Straight Plug:	Pin Number (Solder):
02	F	
02	S	
03	F	
03	S	
04	F	
04	S	
05	F	
05	S	
06	F	
06	S	

Contact Number:	Fixed Socket / Straight Plug:	Pin Number (Solder):
07	F	
07	S	
08	F	
08	S	
09	F	
09	S	
10	F	
10	S	
12	F	
12	S	

Contact Number:	Fixed Socket / Straight Plug:	Pin Number (Solder):
14	F	
14	S	
16	F	
16	S	
18	F	
18	S	
19	F	
19	S	
20	F	
20	S	

Contact Number:	Fixed Socket / Straight Plug:	Pin Number (Solder):
22	F	
22	S	
24	F	
24	S	
26	F	
26	S	
30	F	
30	S	