


# BVA02/A0320/D3 Datasheet

**Product Name // Vertical Power Entry Module 81.5mm Top Fixing Flange Mount C14 Cold Condition Inlet Integral Single Fused (PF0011) 2.8mm Tab Termination A0320 Filter (3A PS21/A L/C v2) Large Red Indicator**

[View Product Page](#)

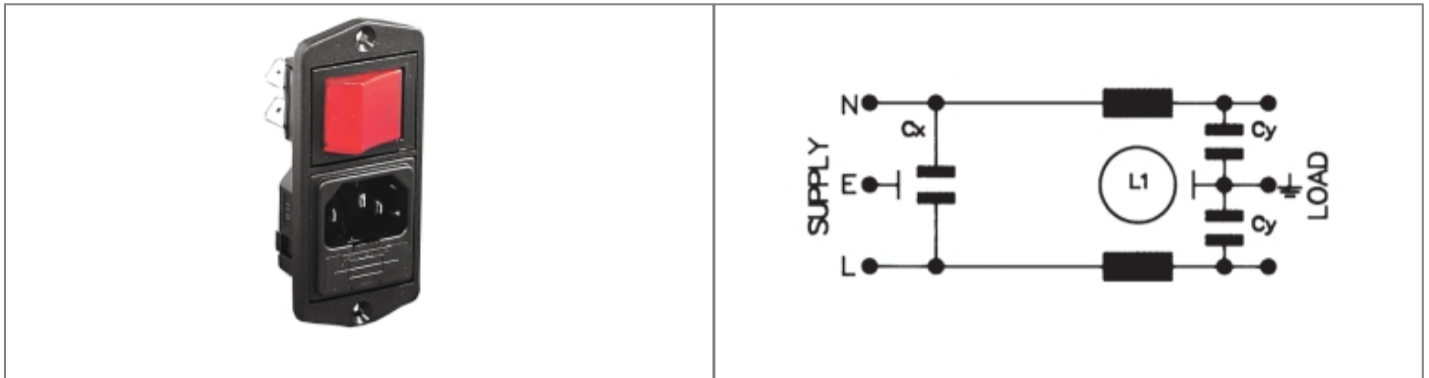

## // Product Description:

- Vertical Power Entry Module 67.5mm/81.5mm (part codes prefixed BVA) and 59mm/72.3mm (part codes prefixed BVB)
- Screw fix to panel via choice of fixing flanges, depending on part code:
- Part codes prefixed BVA: Top fixing flanges
- Part codes prefixed BVB: Side fixing flanges
- C14 Cold Condition Inlet with integral fuseholder(s) depending on part code:
- Part codes prefixed BVA01, BVB01, BVA02, BVB02: PF0011 Single Fused Inlet
- Part codes prefixed BVA15, BVB15, BVA16, BVB16: PF0033 Twin Fused Inlet
- Choice of Termination depending on part code:
- Part codes prefixed BVA01, BVB01, BVA15, BVB15: 6.3mm Tab
- Part codes prefixed BVA02, BVB02, BVA16, BVB16: 2.8mm Tab
- Choice of mains filter depending on part code:
- Part codes containing /Z0000 are unfiltered
- Choice of mains filter options (part codes containing codes starting /A)
- Choice of many other options as specified by individual part code, including indicators, illuminated switches, switch markings, etc

## // General Information:

<b>Product Display Title:</b>	Vertical Power Entry Module 67.5mm/81.5mm (part codes prefixed BVA) and 59mm/72.3mm (part codes prefixed BVB)
<b>Product Family:</b>	IEC Connectors
<b>Product Series:</b>	Power Entry Modules
<b>Current Max:</b>	3A
<b>Filter Type:</b>	3A PS21/A L/C v2
<b>Function:</b>	C14 Inlets
<b>Fuseholder Inlet Type:</b>	Integral Single Fused
<b>iec Connector Components:</b>	None
<b>iec Connector Mates With:</b>	PF0011
<b>iec Filter Options:</b>	A0320
<b>iec Neon Colour:</b>	Red
<b>iec Vertical Module Height:</b>	81.5mm
<b>Inlet Type:</b>	C14 Cold Condition Inlet
<b>Voltage Max:</b>	250V

### // Product PDF Links

[Power Entry Modules product data](#)

### // Product 3D CAD Model Links

[BVA02/A0320/D33D CAD Model](#)